


## LC high power & low pass Filter

DC– 1000MHz

### Physical Dimensions ( $\pm 0.3\text{mm}$ )

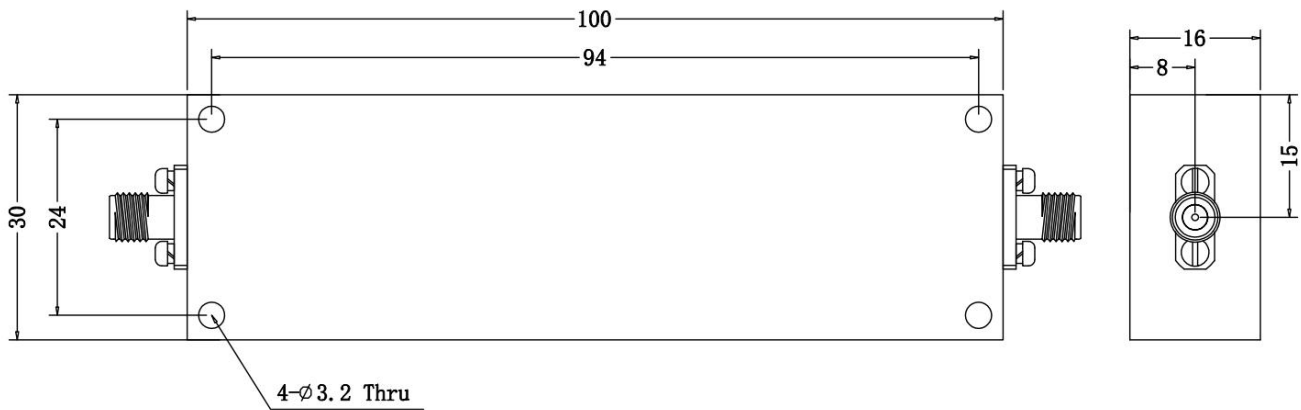

RF Parameter	
Frequency Range	DC-1000MHz
RF Connectors	SMA - K
Insertion Loss (dB)	$\leq 1.0$ dB
Pass Band Ripple (dB)	$\leq \pm 0.25$ dB
Rejection	$\geq 75\text{dB}@1429-1710\text{MHz}$
VSWR	$\leq 1.5$
Surface Finish	Silver Plated
Impedance	50 $\Omega$
Power Handling(W)	200W

Environmental	
Operating Temperature	-30°C~+65°C
Storage Temperature	-30°C~+65°C

Telecommunication



Satellite Teleport



Military/Security



Radar



<https://raytheosmicrowave.com/>

WhatsApp: +86 159 8204 8087

Email: [info1@raytheosmicrowave.com](mailto:info1@raytheosmicrowave.com)