


Cavity Diplexer

2000– 2300MHz

Physical Dimensions ($\pm 0.3\text{mm}$)

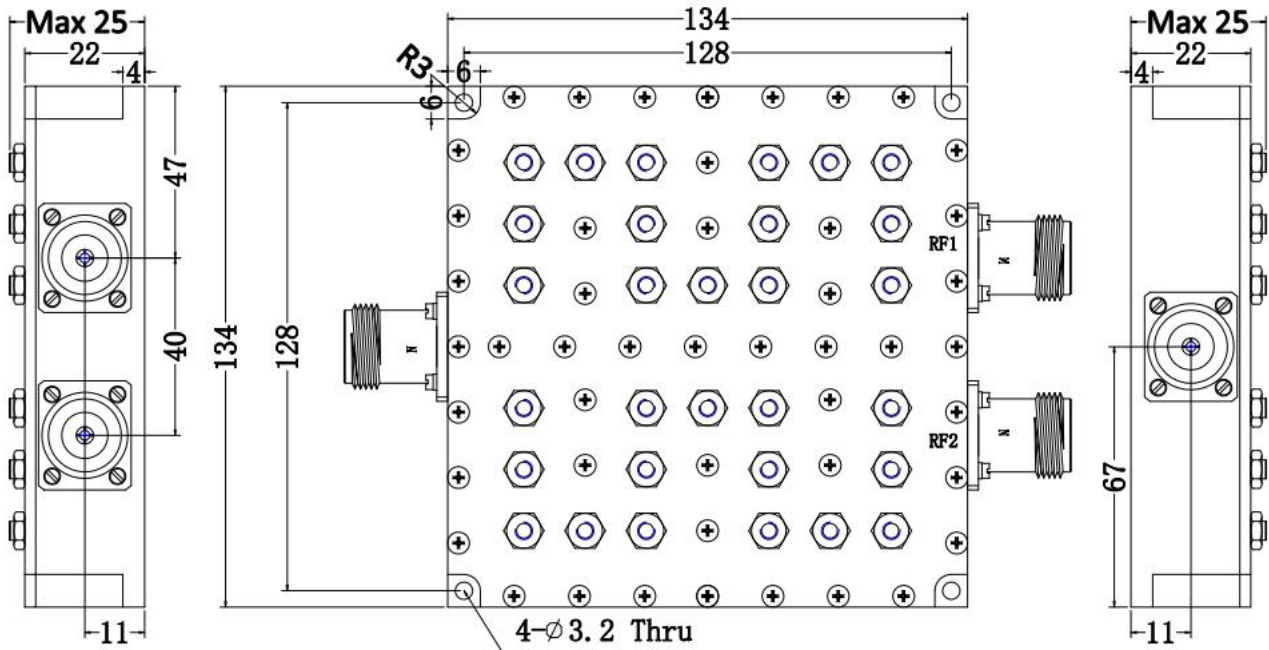

RF Parameter		
Frequency Range (MHz)	2000-2150	2200-2300
Insertion Loss (dB)	≤ 0.6 dB	≤ 0.6 dB
Rejection (dB)	$\geq 85\text{dB}@2200-2300\text{MHz}$	$\geq 85\text{dB}@2000-2150\text{MHz}$
VSWR	$\leq 1.30:1$	$\leq 1.30:1$
Impedance	50 Ω	

RF connector	N-50K
Surface Finish	Silver Plated
Environmental	
Operating Temperature	-40°C--+75°C
Storage Temperature	-40°C--+85°C

Telecommunication



Satellite Teleport



Military/Security



Radar



<https://raytheosmicrowave.com/>
WhatsApp: +86 159 8204 8087
Email: info1@raytheosmicrowave.com